

Bicycle Racks > Horizontal

VANDAL RESISTANT


AS2890.3 COMPLIANT

Compact CBR1SCTM Fully-welded

**CBR1SCTM**  
Hot Dipped Galvanised  
**SCBR1SCTM**  
Stainless Steel




40 x 8mm Base Rails

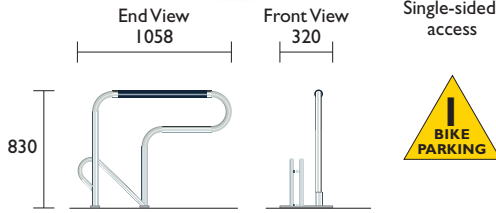


Compact CBR2SCTM Fully-welded

**CBR2SCTM**  
Hot Dipped Galvanised  
**SCBR2SCTM**  
Stainless Steel

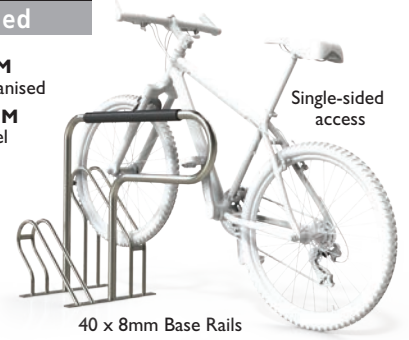

Single-sided access


40 x 8mm Base Rails

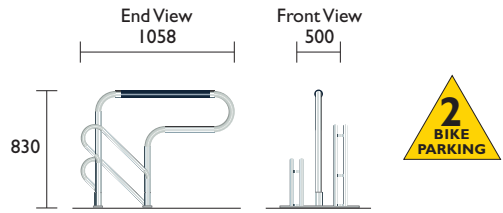

Compact CBR4SCTM Fully-welded

**CBR4SCTM**  
Hot Dipped Galvanised  
**SCBR4SCTM**  
Stainless Steel

Vandal Resistant

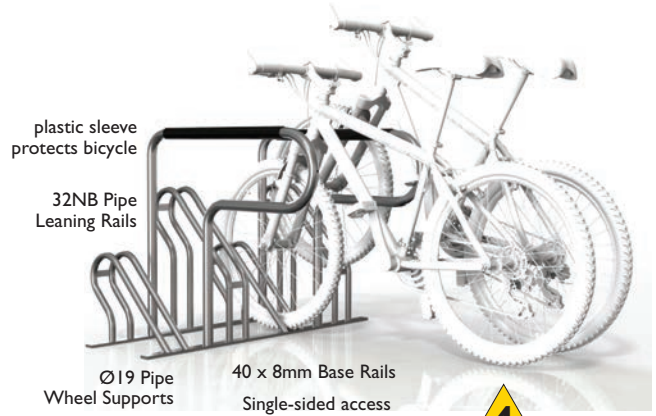


plastic sleeve protects bicycle

32NB Pipe Leaning Rails

Ø19 Pipe Wheel Supports


40 x 8mm Base Rails  
Single-sided access

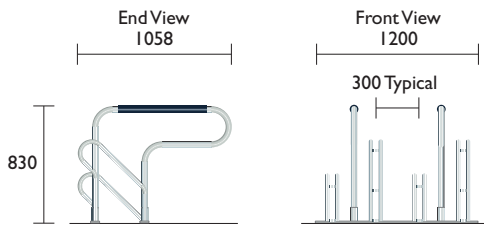


Compact CBR6SC Fully-welded

**CBR6SC**  
Hot Dipped Galvanised  
**SCBR6SC**  
Stainless Steel

plastic sleeve protects bicycle  
32NB Pipe Leaning Rails  
Ø19 Pipe Wheel Supports

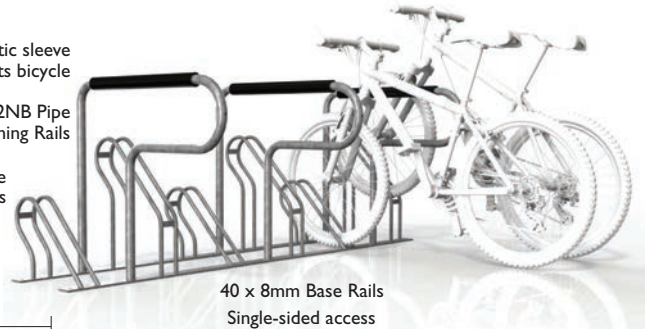

40 x 8mm Base Rails  
Single-sided access

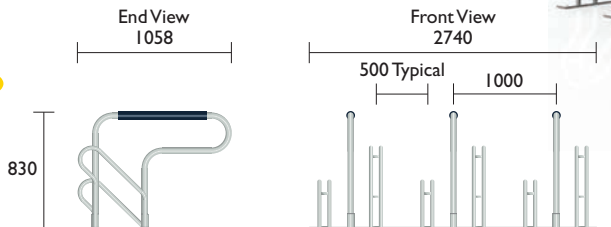

Bicycle Spacings 500mm

Provides wider spacings for easier parking

Kindly note: 400mm spacing version is available upon request which will not comply with standard

These fully welded units are supplied ready to be bolted down. They are available in either hot dipped galvanised or stainless steel. Being fully welded, they are more suitable for vandal resistant applications.

Material Specifications (General)

Mild steel 32NB (38.0) x 1.5mm / Ø19 x 1.2mm Pipe / 8mm Plate / Hot dipped galvanised  
Stainless steel 32NB (38.0) x 1.5mm / Ø19 x 1.2mm Stainless steel pipe / 8mm Plate / Linished

